


Parafuso Sextavado Auto-Brocante com Arruela de Vedação

Diâmetro (d)	Comp (L) Pol.	Chave (S) Pol.	Altura mm (h)	Diâm. Arr. mm (d)	Acabamento	Peso ct/100pçs
12 - 14	3/4	5/16	3,90	14,0	ZINC.BCO	0,480
12 - 14	7/8	5/16	3,90	14,0	ZINC.BCO	0,490
12 - 14	1	5/16	3,90	14,0	ZINC.BCO	0,530
12 - 14	1 1/2	5/16	3,90	14,0	ZINC.BCO	0,680
12 - 14	2	5/16	3,90	14,0	ZINC.BCO	0,860
12 - 14	2 1/2	5/16	3,90	14,0	ZINC.BCO	1,020
12 - 14	3	5/16	3,90	14,0	ZINC.BCO	1,030
12 - 14	3 1/2	5/16	3,90	14,0	ZINC.BCO	1,380
12 - 14	4	5/16	3,90	14,0	ZINC.BCO	1,540
12 - 14	3/4	5/16	3,90	14,0	ORG.MET	0,559
12 - 14	7/8	5/16	3,90	14,0	ECOSEAL	0,600
12 - 14	1	5/16	3,90	14,0	ECOSEAL	0,615
14 - 14	3/4	3/8	4,70	16,0	ZINC.BCO	0,670
14 - 14	7/8	3/8	4,70	16,0	ZINC.BCO	0,715
14 - 14	1	3/8	4,70	16,0	ZINC.BCO	0,770
14 - 14	3/4	3/8	4,70	16,0	ORG.MET	0,760
14 - 14	7/8	3/8	4,70	16,0	ECOSEAL	0,820
14 - 14	1	3/8	4,70	16,0	ECOSEAL	0,700

Aplicações: Utilizado na fixação de telhas.

Dimensões: Conforme padrão Super-Par

Material: Aço carbono

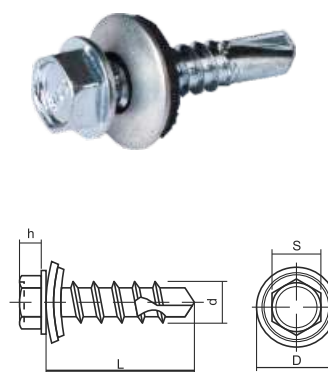

Unidade de Venda: Kg/CT